


G11 Low Pass filters [LP]

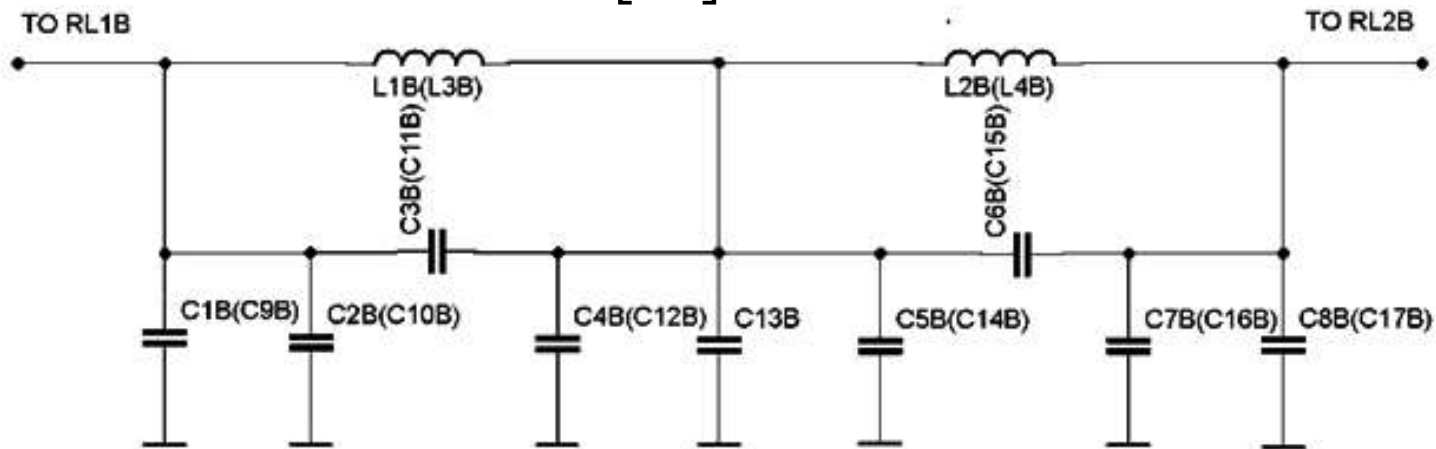

LP Fiter Number	BAND MHz	L1B (L3B) [uH]	No. turns	L2B (L4B) [uH]	No. turns	C1B (C9B) [pF]	C2B (C10B) [pF]	C3B C11B [pF]	(C13B) [pF]	C4B (C12B) [pF]	C5B C14B [pF]	C6B (C15B) [pF]	C7 (C16B) [pF]	C8B (C17B) [pF]
1	1.8	4.2		5.0		680	680	330	1000	1000	470	56	1000	-
2	3.5	1.72	16T	2.3	19T	-	470	330	-	680	470	68	470	-
3	5-7	1.03	13T	1.15	14T	-	330	120	-	680	-	68	330	-
4	5	1.03	13T	1.15	14T	-	330	120	-	680	-	68	330	-
5	7	1.03	13T	1.15	14T	-	330	120	-	680	-	68	330	-
6	7-10	0.83	10T	0.60	10T	-	270*	68	-	470	-	150	220	-
7	10	0.50	11T	0.62	12T	-	180	82	-	180	180	22	180	-
8	10-14	0.50	11T	0.62	12T	-	180	82	-	180	180	22	180	-
9	14	0.50	11T	0.62	12T	-	180	82	-	180	180	22	180	-
10	14-18	0.32	8T	0.41	9T	-	82	56	-	220	-	22	120	-
11	14-18-21	0.32	8T	0.41	9T	-	82	56	-	220	-	22	120	-
12	18-21	0.32	8T	0.41	9T	-	82	56	-	220	-	22	120	-
13	24-30	0.25	6T	0.28	7T	-	56	33	-	150	-	22	68	-
14	28	0.25	6T	0.28	7T	-	56	33	-	150	-	22	68	-
15	21-24-28	0.25	6T	0.28	7T	-	56	33	-	150	-	22	68	-
16	50	0.178		0.15		-	39	15	-	82	-	15	33	-
17	137	56		68		-	22000	4700	22000	10000	10000	-	22000	-
18	500	15		18.5		-	6800	1000		2700	10000	-	6800	-

* 270 pF supplied as 22pF + 4.7pF install in parallel